

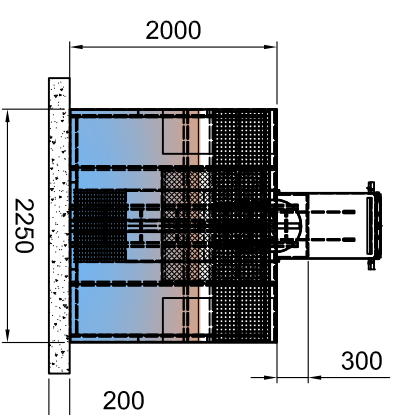
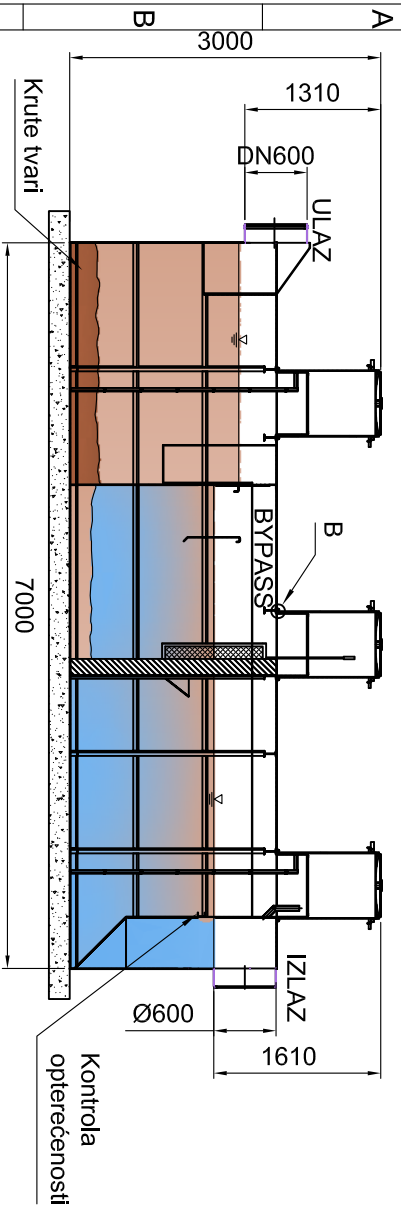


Presjek A-A




Regulacijska kliznih grla vijcima M12x25

Koalescentni ulošči

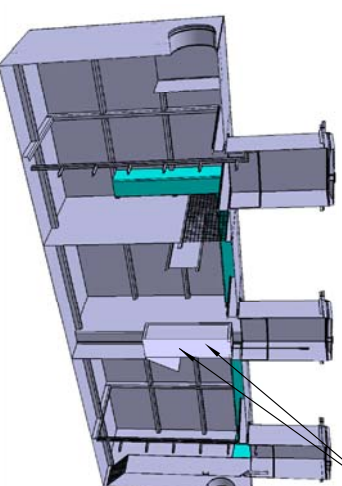


Polipropilenski koalescentni uložak

AB podloga

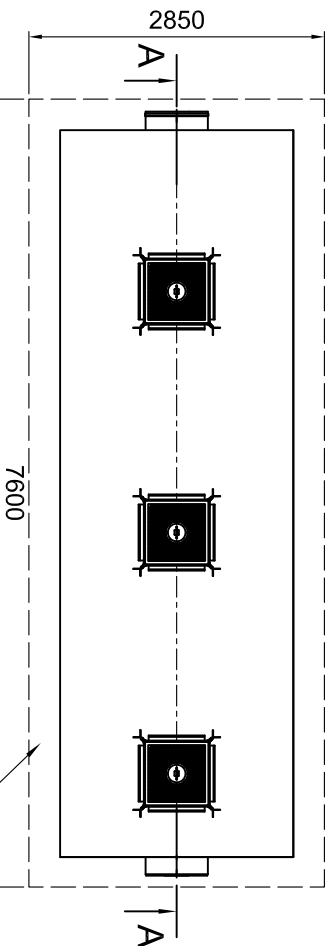

Čelični anker

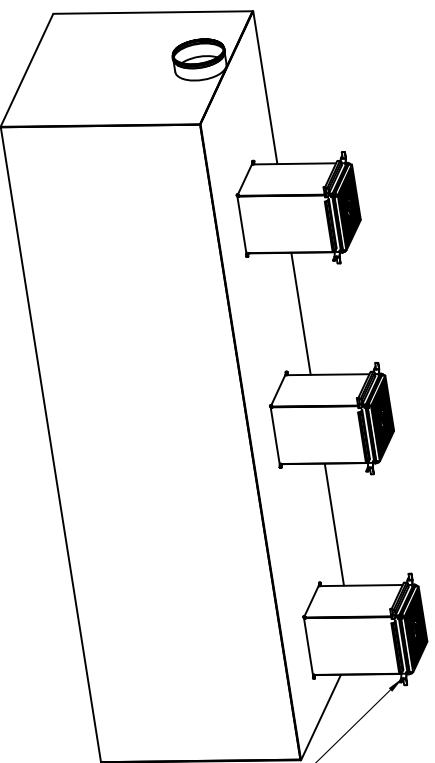

Separatori spadaju u I. klasu separatora prema hrvatskoj normi HRN EN 858 što znači da je količina rezidualnog ulja manja od 5 mg/l

Volumen separatora: 30000 l
 Protok separatora: 125/500 l/s
 Cijevi: Ø600
 Masa praznog separatora: 5650 kg
 Masa punog separatora: 30000 kg

Površina	Mjerilo	1:50	1:50
	EN	858	

Ime	Datum	Potpis
Čiao	2.09.2014.	Levačić I. dplj.lng.str
Prekont	2.09.2014.	Horvat D.magnjng.mech.
Odobrio	2.09.2014.	Horvat D.j. str.teh.sec

Separator s bypassom
 Q=125/500 lit/sec



TX-DK-D-1907-SEP30000BP-S1

rad/bilj	Promjena	Datum	Ime	Spremljeno	TX-DK-D-1907-SEP30000BP-S1
----------	----------	-------	-----	------------	----------------------------